


# Timing Pulley HTD 14M-40

14mm Pitch for 40 mm belt width

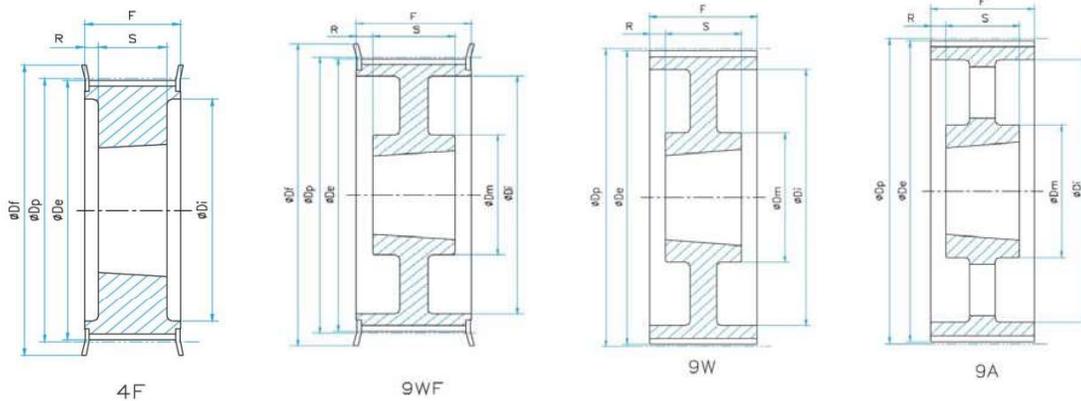


\*All dimensions are mm

Part No.	Teeth No.	Conf.	Material	Bush No.	Dp	De	Df	Dm	Di	F	S	R	Flange Dimension
TL28-14M-40	28	4F	STEEL	2012	124.78	122.12	128	-	94	54	32	11	128x107x2.5
TL29-14M-40	29	4F		2012	129.23	126.57	138	-	98	54	32	11	138x112x2.5
TL30-14M-40	30	4F		2012	133.69	130.99	138	-	98	54	32	11	138x112x2.5
TL32-14M-40	32	4F		2012	142.60	139.88	154	-	108	54	32	11	154x122x2.5
TL34-14M-40	34	4F		2517	151.52	148.79	160	-	110	54	45	4.5	160x130x2.5
TL36-14M-40	36	4F		2517	160.43	157.68	168	-	120	54	45	4.5	168x135x2.5
TL38-14M-40	38	4F		2517	169.34	166.60	183	-	130	54	45	4.5	183x145x2.5
TL40-14M-40	40	4F		2517	178.25	175.49	188	-	138	54	45	4.5	188x150x2.5
TL44-14M-40	44	4F		3020	196.08	193.28	211	-	155	54	51	1.5	211x173x2.5
TL48-14M-40	48	4F		3020	213.90	211.11	226	-	170	54	51	1.5	226x190x2.5
TL56-14M-40	56	9WF	3020	249.55	246.76	256	170	208	54	51	1.5	256x225x2.5	
TL64-14M-40	64	9WF	CAST IRON	3020	285.21	282.41	296	170	240	54	51	1.5	296x260x2.5
TL72-14M-40	72	9W		3020	320.86	318.06	-	170	280	54	51	1.5	-
TL80-14M-40	80	9A		3020	356.51	353.71	-	170	315	54	51	1.5	-
TL90-14M-40	90	9A		3020	401.07	398.28	-	170	360	54	51	1.5	-
TL112-14M-40	112	9A		3020	499.11	496.32	-	170	457	54	51	1.5	-
TL144-14M-40	144	9A		3020	641.71	638.92	-	170	600	54	51	1.5	-
TL168-14M-40	168	9A		3020	748.66	745.87	-	170	706	54	51	1.5	-
TL192-14M-40	192	9A		3020	855.62	852.82	-	170	813	54	51	1.5	-
TL216-14M-40	216	9A	3020	962.57	959.76	-	170	920	54	51	1.5	-	

Note: 1, Flange dimension: O.D.x I.D.x Thickness.

# Timing Pulley HTD 14M-55

14mm Pitch for 55 mm belt width

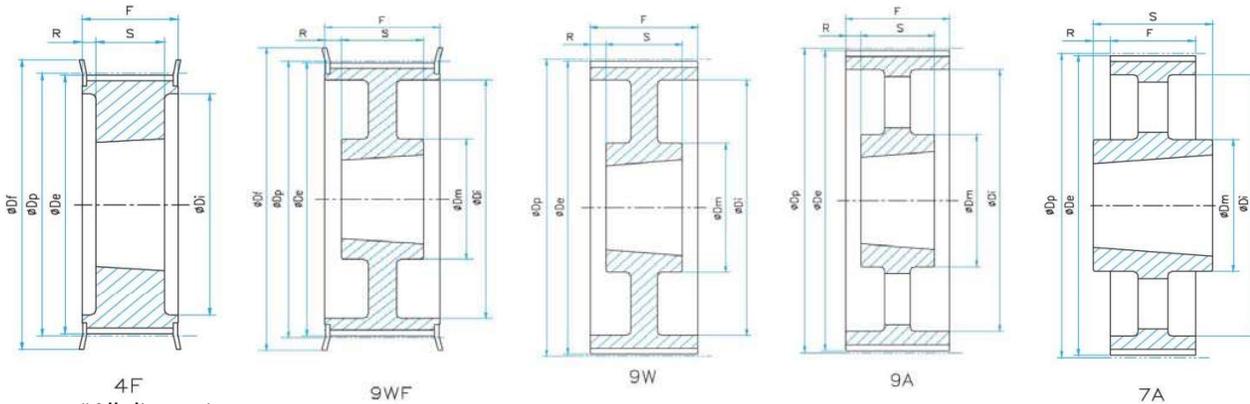


\*All dimensions are mm

Part No.	Teeth No.	Confi.	Material	Bush No.	Dp	De	Df	Dm	Di	F	S	R	Flange Dimension
TL28-14M-55	28	4F	STEEL	2012	124.78	122.12	128	-	94	70	32	19	128x107x2.5
TL29-14M-55	29	4F		2012	129.23	126.57	138	-	100	70	32	19	138x112x2.5
TL30-14M-55	30	4F		2517	133.69	130.99	138	-	100	70	45	12.5	138x112x2.5
TL32-14M-55	32	4F		2517	142.60	139.88	154	-	108	70	45	12.5	154x122x2.5
TL34-14M-55	34	4F		2517	151.52	148.79	160	-	110	70	45	12.5	160x130x2.5
TL36-14M-55	36	4F		2517	160.43	157.68	168	-	120	70	45	12.5	168x135x2.5
TL38-14M-55	38	4F		2517	169.34	166.60	183	-	130	70	45	12.5	183x145x2.5
TL40-14M-55	40	4F		2517	178.25	175.49	188	-	138	70	45	12.5	188x150x2.5
TL44-14M-55	44	4F		3020	196.08	193.28	211	-	155	70	51	9.5	211x173x2.5
TL48-14M-55	48	4F		3020	213.90	211.11	226	-	170	70	51	9.5	226x190x2.5
TL56-14M-55	56	9WF	3020	249.55	246.76	256	170	208	70	51	9.5	256x225x2.5	
TL64-14M-55	64	9WF	CAST IRON	3020	285.21	282.41	296	170	240	70	51	9.5	296x260x2.5
TL72-14M-55	72	9W		3020	320.86	318.06	-	170	280	70	51	9.5	-
TL80-14M-55	80	9A		3020	356.51	353.71	-	170	315	70	51	9.5	-
TL90-14M-55	90	9A		3020	401.07	398.28	-	170	360	70	51	9.5	-
TL112-14M-55	112	9A		3020	499.11	496.32	-	170	457	70	51	9.5	-
TL144-14M-55	144	9A		3020	641.71	638.92	-	170	600	70	51	9.5	-
TL168-14M-55	168	9A		3020	748.66	745.87	-	170	706	70	51	9.5	-
TL192-14M-55	192	9A		3020	855.62	852.82	-	170	813	70	51	9.5	-
TL216-14M-55	216	7A	3535	962.57	959.76	-	190	920	70	89	9.5	-	

Note: 1, Flange dimension: O.D.x I.D.x Thickness.

# Timing Pulley HTD 14M-85

14mm Pitch for 85 mm belt width

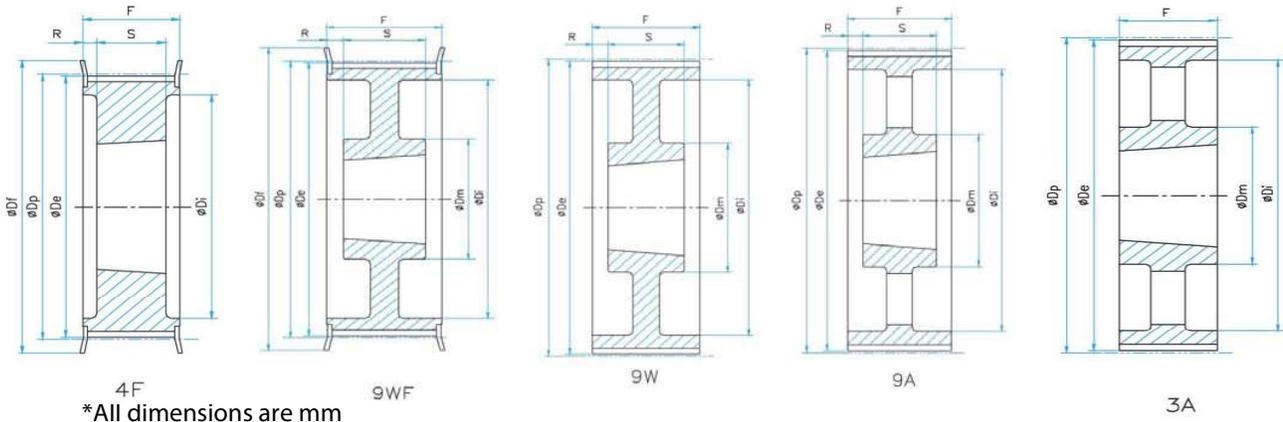


\*All dimensions are mm

Part No.	Teeth No.	Confi.	Material	Bush No.	Dp	De	Df	Dm	Di	F	S	R	Flange Dimension
TL28-14M-85	28	4F	STEEL	2517	124.78	122.12	128	-	98	102	45	28.5	128x107x2.5
TL29-14M-85	29	4F		2517	129.23	126.57	138	-	100	102	45	28.5	138x112x2.5
TL30-14M-85	30	4F		2517	133.69	130.99	138	-	100	102	45	28.5	138x112x2.5
TL32-14M-85	32	4F		2517	142.60	139.88	154	-	108	102	45	28.5	154x122x2.5
TL34-14M-85	34	4F		2517	151.52	148.79	160	-	110	102	45	28.5	160x130x2.5
TL36-14M-85	36	4F		3020	160.43	157.68	168	-	120	102	51	25.5	168x135x2.5
TL38-14M-85	38	4F		3020	169.34	166.60	183	-	130	102	51	25.5	183x145x2.5
TL40-14M-85	40	4F		3020	178.25	175.49	188	-	138	102	51	25.5	188x150x2.5
TL44-14M-85	44	4F		3020	196.08	193.28	211	-	153	102	51	25.5	211x173x2.5
TL48-14M-85	48	4F		3020	213.90	211.11	226	-	170	102	51	25.5	226x190x2.5
TL56-14M-85	56	4F	3525	249.55	246.76	256	170	210	102	65	18.5	256x225x2.5	
TL64-14M-85	64	9WF	CAST IRON	3525	285.21	282.41	296	170	240	102	65	18.5	296x260x2.5
TL72-14M-85	72	9W		3525	320.86	318.06	-	170	280	102	65	18.5	-
TL80-14M-85	80	9A		3525	356.51	353.71	-	170	315	102	65	18.5	-
TL90-14M-85	90	9A		3525	401.07	398.28	-	170	360	102	65	18.5	-
TL112-14M-85	112	9A		3525	499.11	496.32	-	170	457	102	65	18.5	-
TL144-14M-85	144	9A		3525	641.71	638.92	-	170	600	102	65	18.5	-
TL168-14M-85	168	9A		3525	748.66	745.87	-	170	706	102	65	18.5	-
TL192-14M-85	192	3A		4040	855.62	852.82	-	170	813	102	102	-	-
TL216-14M-85	216	3A	4040	962.57	959.76	-	190	920	102	102	-	-	

Note: 1, Flange dimension: O.D.x I.D.x Thickness.

# Timing Pulley HTD 14M-115

14mm Pitch for 115 mm belt width

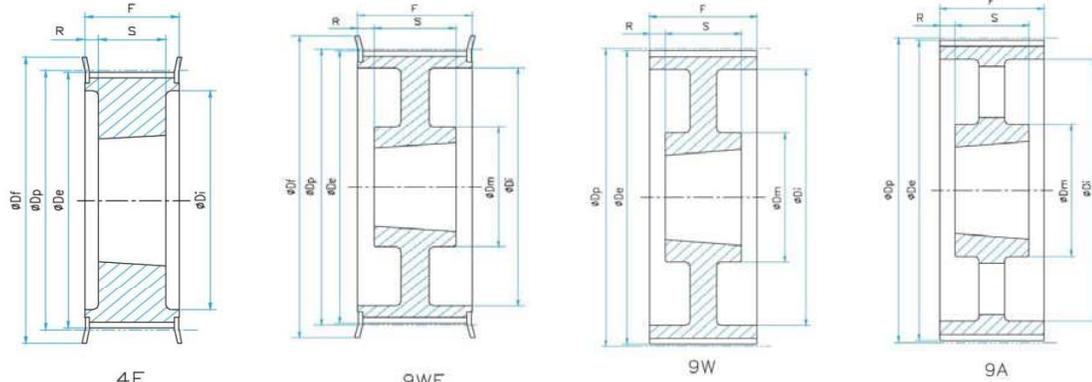


\*All dimensions are mm

Part No.	Teeth No.	Confi.	Material	Bush No.	Dp	De	Df	Dm	Di	F	S	R	Flange Dimension
TL28-14M-115	28	4F	STEEL	2517	124.78	122.12	128	-	98	133	45	44	128x107x2.5
TL29-14M-115	29	4F		2517	129.23	126.57	138	-	100	133	45	44	138x112x2.5
TL30-14M-115	30	4F		2517	133.69	130.99	138	-	100	133	45	44	138x112x2.5
TL32-14M-115	32	4F		2517	142.60	139.88	154	-	108	133	45	44	154x122x2.5
TL34-14M-115	34	4F		2517	151.52	148.79	160	-	110	133	45	44	160x130x2.5
TL36-14M-115	36	4F		3020	160.43	157.68	168	-	125	133	51	41	168x135x2.5
TL38-14M-115	38	4F		3020	169.34	166.60	183	-	130	133	51	41	183x145x2.5
TL40-14M-115	40	4F		3020	178.25	175.49	188	-	138	133	51	41	188x150x2.5
TL44-14M-115	44	4F		3020	196.08	193.28	211	-	155	133	76	28.5	211x173x2.5
TL48-14M-115	48	4F		3020	213.90	211.11	226	-	170	133	76	28.5	226x190x2.5
TL56-14M-115	56	4F	3535	249.55	246.76	256	-	208	133	89	22	256x225x2.5	
TL64-14M-115	64	9WF	CAST IRON	3535	285.21	282.41	296	190	240	133	89	22	296x260x2.5
TL72-14M-115	72	9W		3535	320.86	318.06	-	190	280	133	89	22	-
TL80-14M-115	80	9A		3535	356.51	353.71	-	190	315	133	89	22	-
TL90-14M-115	90	9A		3535	401.07	398.28	-	190	360	133	89	22	-
TL112-14M-115	112	9A		3535	499.11	496.32	-	190	457	133	89	22	-
TL144-14M-115	144	9A		4040	641.71	638.92	-	230	600	133	102	15.5	-
TL168-14M-115	168	9A		4040	748.66	745.87	-	230	706	133	102	15.5	-
TL192-14M-115	192	9A		4040	855.62	852.82	-	230	813	133	102	15.5	-
TL216-14M-115	216	9A	4040	962.57	959.76	-	230	920	133	102	15.5	-	

Note: 1, Flange dimension: O.D.x I.D.x Thickness.

# Timing Pulley HTD 14M-170

14mm Pitch for 170 mm belt width

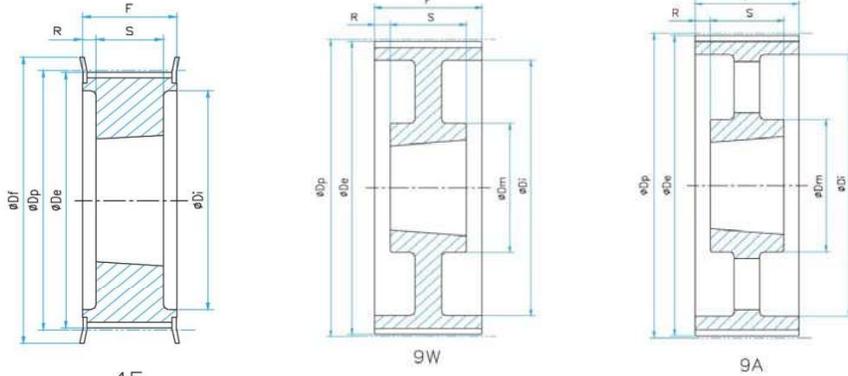

\*All dimensions are mm

Part No.	Teeth No.	Conf.	Material	Bush No.	Dp	De	Df	Dm	Di	F	S	R	Flange Dimension
TL38-14M-170	38	4F	STEEL	3030	169.34	166.60	183	-	130	187	76	55.5	183x145x2.5
TL40-14M-170	40	4F		3030	178.25	175.49	188	-	138	187	76	55.5	188x150x2.5
TL44-14M-170	44	4F		3535	196.08	193.28	211	-	153	187	89	49	211x173x2.5
TL48-14M-170	48	4F		3535	213.90	211.11	226	-	170	187	89	49	226x190x2.5
TL56-14M-170	56	4F		3535	249.55	246.76	256	-	208	187	89	49	256x225x2.5
TL64-14M-170	64	4F	CAST IRON	4040	285.21	282.41	296	-	240	187	102	42.5	296x260x2.5
TL72-14M-170	72	9W		4040	320.86	318.06	-	230	280	187	102	42.5	-
TL80-14M-170	80	9W		4040	356.51	353.71	-	230	315	187	102	42.5	-
TL90-14M-170	90	9A		4040	401.07	398.28	-	230	360	187	102	42.5	-
TL112-14M-170	112	9A		5050	499.11	496.32	-	265	457	187	127	30	-
TL144-14M-170	144	9A		5050	641.71	638.92	-	265	600	187	127	30	-
TL168-14M-170	168	9A		5050	748.66	745.87	-	265	706	187	127	30	-
TL192-14M-170	192	9A		5050	855.62	852.82	-	265	813	187	127	30	-
TL216-14M-170	216	9A		5050	962.57	959.76	-	265	920	187	127	30	-

Note: 1, Flange dimension: O.D.x I.D.x Thickness.