


Timing Pulley HTD 8M-20

8mm Pitch for 20 mm belt width

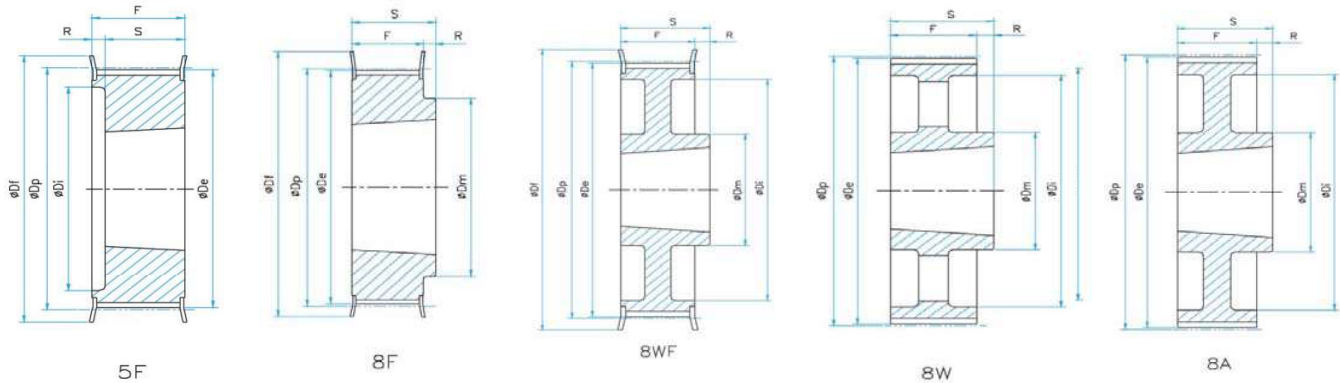


*All dimensions are mm

Part No.	Teeth No.	Confi.	Material	Bush No.	Dp	De	Df	Dm	Di	F	S	R	Flange Dimension
TL22-8M-20	22	5F	STEEL	1108	56.02	54.65	60	-	37	28	22	6	60x47x1.5
TL24-8M-20	24	5F		1108	61.12	59.75	66	-	44	28	22	6	66x52x1.5
TL26-8M-20	26	5F		1108	66.21	64.84	70	-	45	28	22	6	70x53x1.5
TL28-8M-20	28	5F		1108	71.30	69.93	75	-	50	28	22	6	75x60x1.5
TL30-8M-20	30	5F		1108	76.39	75.02	83	-	58	28	22	6	83x68x1.5
TL32-8M-20	32	5F		1610	81.49	80.12	87	-	63	28	25	3	87x72x1.5
TL34-8M-20	34	5F		1610	86.58	85.22	91	-	64	28	25	3	91x73x1.5
TL36-8M-20	36	5F		1610	91.67	90.30	97	-	68	28	25	3	97x79x1.5
TL38-8M-20	38	5F		1610	96.77	95.39	102	-	72	28	25	3	102x82.5x1.5
TL40-8M-20	40	5F		1610	101.86	100.49	106	-	76	28	25	3	106x90x1.5
TL44-8M-20	44	8F		2012	112.05	110.67	120	93	-	28	32	4	120x99.5x1.5
TL48-8M-20	48	8F		2012	122.23	120.86	128	96	-	28	32	4	128x107x1.5
TL56-8M-20	56	8F		2012	142.60	141.23	150	110	-	28	32	4	150x130x1.5
TL64-8M-20	64	8WF		2012	162.97	161.60	168	110	137	28	32	4	168x148x1.5
TL72-8M-20	72	8WF		2012	183.35	181.97	192	110	158	28	32	4	192x173x1.5
TL80-8M-20	80	8W	CAST IRON	2012	203.72	202.35	-	110	180	28	32	4	-
TL90-8M-20	90	8A		2012	229.18	227.81	-	110	204	28	32	4	-
TL144-8M-20	144	8A		2517	366.69	365.32	-	125	336	28	32	4	-

Note: 1, Flange dimension: O.D.x I.D.x Thickness.

Timing Pulley HTD 8M-30

8mm Pitch for 30 mm belt width

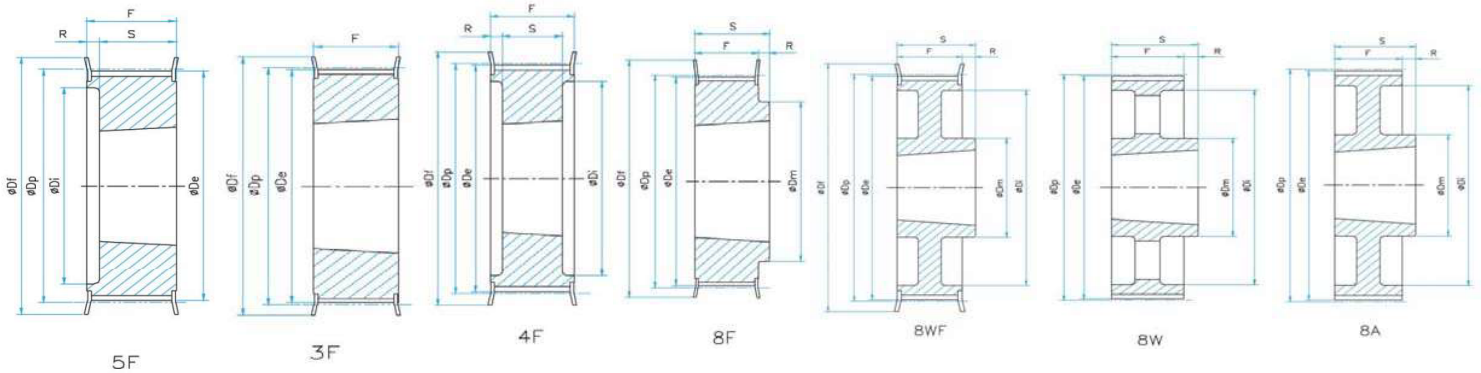


*All dimensions are mm

Part No.	Teeth No.	Confi.	Material	Bush No.	Dp	De	Df	Dm	Di	F	S	R	Flange Dimension
TL22-8M-30	22	5F	STEEL	1108	56.02	54.65	60	-	37	38	22	16	60x47x1.5
TL24-8M-30	24	5F		1108	61.12	59.75	66	-	44	38	22	16	66x52x1.5
TL26-8M-30	26	5F		1108	66.21	64.84	70	-	44	38	22	16	70x53x1.5
TL28-8M-30	28	5F		1210	71.30	69.93	75	-	50	38	25	13	75x60x1.5
TL30-8M-30	30	3F		1615	76.39	75.02	83	-	-	38	38	-	83x68x1.5
TL32-8M-30	32	3F		1615	81.49	80.12	87	-	-	38	38	-	87x72x1.5
TL34-8M-30	34	3F		1615	86.58	85.22	91	-	-	38	38	-	91x73x1.5
TL36-8M-30	36	3F		1615	91.67	90.30	97	-	-	38	38	-	97x79x1.5
TL38-8M-30	38	3F		1615	96.77	95.39	102	-	-	38	38	-	102x82.5x1.5
TL40-8M-30	40	3F		1615	101.86	100.49	106	-	-	38	38	-	106x90x1.5
TL44-8M-30	44	4F		2012	112.05	110.67	120	-	86	38	32	3	120x99.5x1.5
TL48-8M-30	48	4F		2012	122.23	120.86	128	-	90	38	32	3	128x107x1.5
TL56-8M-30	56	4F		2012	142.60	141.23	150	-	110	38	32	3	150x130x1.5
TL64-8M-30	64	8F		2517	162.97	161.60	168	125	-	38	45	7	168x148x1.5
TL72-8M-30	72	8WF		2517	183.35	181.97	192	125	158	38	45	7	192x173x1.5
TL80-8M-30	80	8W	CAST IRON	2517	203.72	202.35	-	125	180	38	45	7	-
TL90-8M-30	90	8A		2517	229.18	227.81	-	125	204	38	45	7	-
TL112-8M-30	112	8A		2517	285.21	283.83	-	125	254	38	45	7	-
TL144-8M-30	144	8A		2517	366.69	365.32	-	125	336	38	45	7	-

Note: 1, Flange dimension: O.D.x I.D.x Thickness.

Timing Pulley HTD 8M-50

8mm Pitch for 50 mm belt width

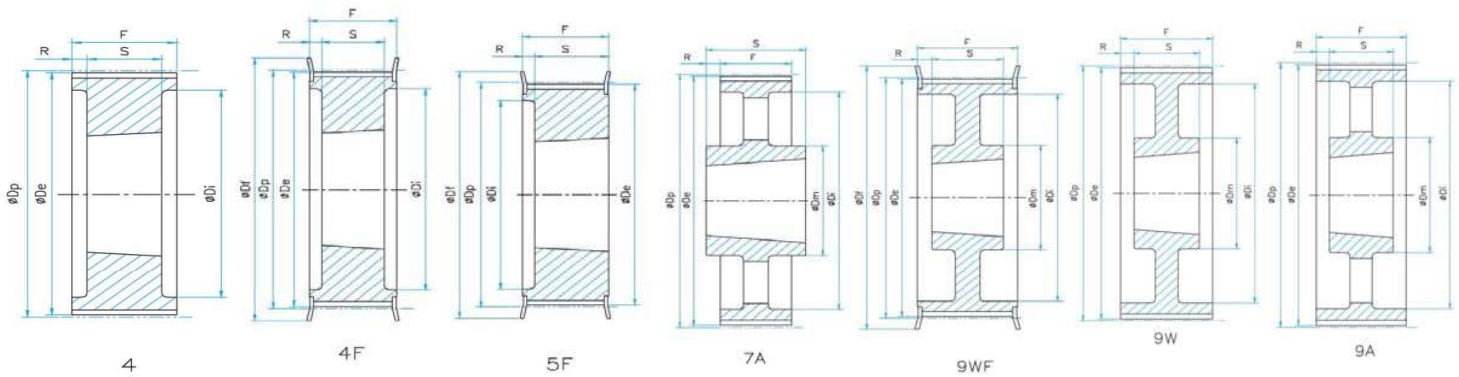


*All dimensions are mm

Part No.	Teeth No.	Confi.	Material	Bush No.	Dp	De	Df	Dm	Di	F	S	R	Flange Dimension
TL28-8M-50	28	4F	STEEL	1210	71.30	69.93	75	-	50	60	25	17.5	75x60x1.5
TL30-8M-50	30	5F		1615	76.39	75.02	83	-	58	60	38	22	83x68x1.5
TL32-8M-50	32	5F		1615	81.49	80.12	87	-	62	60	38	22	87x72x1.5
TL34-8M-50	34	5F		1615	86.58	85.22	91	-	65	60	38	22	91x73x1.5
TL36-8M-50	36	5F		1615	91.67	90.30	97	-	68	60	38	22	97x79x1.5
TL38-8M-50	38	5F		1615	96.77	95.39	102	-	72	60	38	22	102x82.5x1.5
TL40-8M-50	40	4F		2012	101.86	100.49	106	-	82	60	32	14	106x90x1.5
TL44-8M-50	44	4F		2012	112.05	110.67	120	-	91	60	32	14	120x99.5x1.5
TL48-8M-50	48	4F		2012	122.23	120.86	128	-	95	60	32	14	128x107x1.5
TL56-8M-50	56	4F		2517	142.60	141.23	150	-	116	60	45	7.5	150x130x1.5
TL64-8M-50	64	4F		2517	162.97	161.60	168	-	137	60	45	7.5	168x148x1.5
TL72-8M-50	72	9WF		2517	183.35	181.97	192	125	158	60	45	7.5	192x173x1.5
TL80-8M-50	80	4	CAST IRON	3020	203.72	202.35	-	-	180	60	51	4.5	-
TL90-8M-50	90	9W		3020	229.18	227.81	-	170	204	60	51	4.5	-
TL112-8M-50	112	9W		3020	285.21	283.83	-	170	260	60	51	4.5	-
TL144-8M-50	144	9A		3020	366.69	365.32	-	170	341	60	51	4.5	-
TL168-8M-50	168	7A		3525	427.81	426.44	-	198	395	60	65	2.5	-
TL192-8M-50	192	7A		3525	488.92	487.55	-	198	455	60	65	2.5	-

Note: 1, Flange dimension: O.D.x I.D.x Thickness.

Timing Pulley HTD 8M-85

8mm Pitch for 85mm belt width

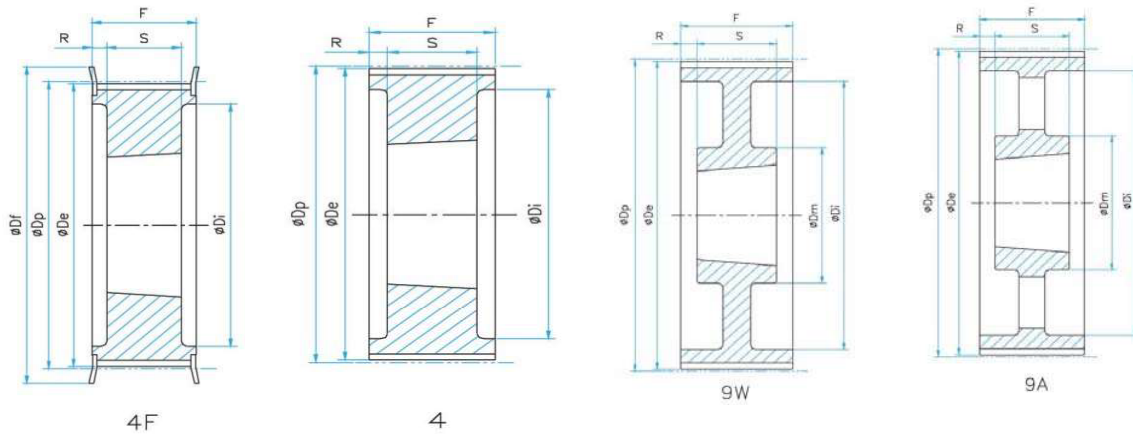

*All dimensions are mm

Part No.	Teeth No.	Confi.	Material	Bush No.	Dp	De	Df	Dm	Di	F	S	R	Flange Dimension
TL34-8M-85	34	4F	STEEL	1615	86.58	85.22	91	-	65	95	38	28.5	91x73x1.5
TL36-8M-85	36	4F		1615	91.67	90.30	97	-	68	95	38	28.5	97x79x1.5
TL38-8M-85	38	4F		1615	96.77	95.39	102	-	72	95	38	28.5	102x82.5x1.5
TL40-8M-85	40	4F		2012	101.86	100.49	106	-	82	95	32	31.5	106x90x1.5
TL44-8M-85	44	4F		2012	112.05	110.67	120	-	91	95	32	31.5	120x99.5x1.5
TL48-8M-85	48	4F		2517	122.23	120.86	128	-	100	95	45	25	128x107x1.5
TL56-8M-85	56	4F		2517	142.60	141.23	150	-	117	95	45	25	150x130x1.5
TL64-8M-85	64	4F		2517	162.97	161.60	168	-	137	95	45	25	168x148x1.5
TL72-8M-85	72	4F		3020	183.35	181.97	192	-	158	95	51	22	192x173x1.5
TL80-8M-85	80	4	CAST IRON	3020	203.72	202.35	-	-	180	95	51	22	-
TL90-8M-85	90	9W		3020	229.18	227.81	-	170	204	95	51	22	-
TL112-8M-85	112	9W		3020	285.21	283.83	-	170	260	95	51	22	-
TL144-8M-85	144	9A		3525	366.69	365.32	-	198	336	95	65	15	-
TL168-8M-85	168	9A		3525	427.81	426.44	-	198	395	95	65	15	-
TL192-8M-85	192	9A		3525	488.92	487.55	-	198	455	95	65	15	-

Note: 1, Flange dimension: O.D.x I.D.x Thickness.