


Timing Pulley HTD 5M-15

5mm Pitch for 15 mm belt width

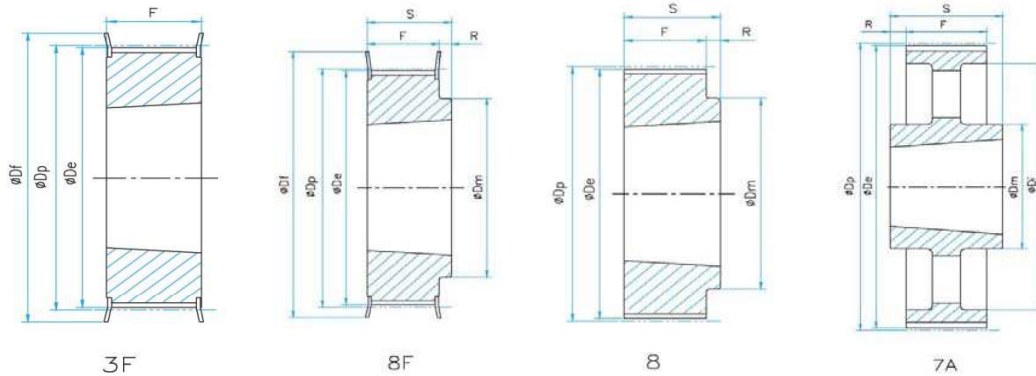

*All dimensions are mm

Part No.	Teeth No.	Confi.	Material	Bush No.	Dp	De	Df	Dm	Di	F	S	R	Flange Dimension
TL34-5M-15	34	3F	STEEL	1008	54.11	52.97	57	-	-	22	22	-	57.0x47.0x1.0
TL36-5M-15	36	3F		1108	57.30	56.15	60	-	-	22	22	-	60.0x47.0x1.0
TL38-5M-15	38	3F		1108	60.48	59.34	66.5	-	-	22	22	-	66.5x52.0x1.0
TL40-5M-15	40	3F		1108	63.66	62.52	71	-	-	22	22	-	71.0x56.0x1.0
TL44-5M-15	44	3F		1108	70.03	68.89	75	-	-	22	22	-	75.0x60.0x1.0
TL48-5M-15	48	8F		1210	76.39	75.25	83	59	-	22	25	3	83.0x68.0x1.0
TL56-5M-15	56	8F		1210	89.13	87.99	93	70	-	22	25	3	93.0x80.0x1.0
TL64-5M-15	64	8F		1210	101.86	100.72	106	80	-	22	25	3	106.0x90.0x1.0
TL72-5M-15	72	8		1610	114.59	113.45	-	92	-	22	25	3	-
TL80-5M-15	80	8		1610	127.32	126.18	-	92	-	22	25	3	-
TL90-5M-15	90	8		1610	143.24	142.10	-	92	-	22	25	3	-
TL112-5M-15	112	8		2012	178.25	177.11	-	110	-	20	32	12	-
TL136-5M-15	136	7A		2012	216.45	215.31	-	110	199	20	32	6	-

Note: 1, Flange dimension: O.D.x I.D.x Thickness.